


Inverted vent check valve 1750 serie

Inverted Vent Check Valves protect tanks and bulkheads from pressure build-up during loading and unloading of liquid or dry cargo and assure maximum efficiency during operations. The ball float prevents contamination of the tank cargo by sea water during heavy seas. All steel castings are hot dipped galvanized.

All aluminum castings are anodized.

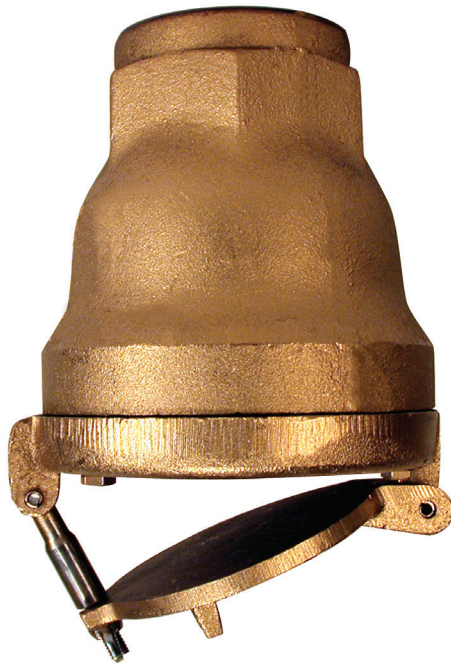

SPECIFICATIONS

**GALVANIZED STEEL /
ANODIZED ALUMINUM/
STAINLESS STEEL**

FLOAT MATERIAL

316 stainless steel (standard)
Copper
High density polyethylene
Monel

CONNECTIONS

Threaded
Buttweld
Socketweld
Flanged
Victaulic

SIZES

.50", .75", 1", 1.25", 1.5", 2", 2.5", 3", 4"

Bronze

FLOAT MATERIAL

316 stainless steel (standard)
Copper
High density polyethylene
Monel

CONNECTIONS

Threaded
Flanged
Sil-brazed
Victaulic

SIZES

.50", .75", 1", 1.25", 1.5", 2", 2.5", 3", 4"



Email: info@wager-europe.com

Telephone: +31 343 45 78 63

Web: Wager-europe.com