


# 1850 MARINE ODOR CONTROL VALVE

The 1850 is a combination odor control vent valve, with the additional feature of a ball check to prevent water from submerging the media bed during rough seas.

The 1850 is cast in 356-T6 aluminum, and epoxy coated for protection from the harsh sea environment. It is available with either a 4" or 6" flanged end that mounts directly to a gooseneck pipe. The interior of the body contains a canister filled with 12 lbs of odor scrubbing media.

The media is engineered in pellet form to allow for excellent airflow thru the media bed. Our media is highly effective in removing hydrogen sulfide gas ( H<sub>2</sub>S ). Pellets are non-toxic, and landfill disposable.

Every 1850 is equipped with tamper proof lockable latches, a HDPE float, and stainless screens to prevent debris from entering into the valve casting.

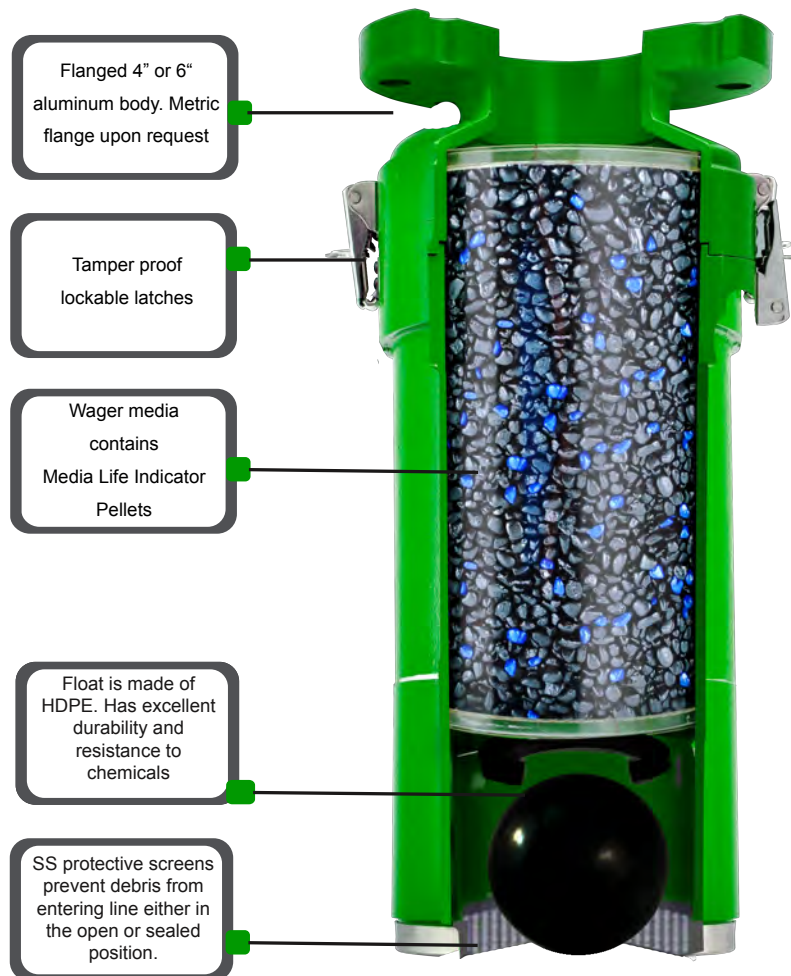

## BODY

- 356-T6 ALUMINUM ALLOY
- POWDER COATED
- 4" OR 6" FLANGED END
- LOCKABLE LATCHES

## MEDIA

- TRANSPARENT MEDIA CANISTER
- 12 LBS WAGER MEDIALIFE PELLETS
- NON-TOXIC, LANDFILL DISPOSABLE
- COMPLIMENTARY LAB ANALYSIS AFTER 12 MONTHS OF USE

## FLOAT

- HDPE FLOAT BALL

## SCREENS

- 316 STAINLESS DEBRIS SCREENS

## CAP

- 316 STAINLESS STEEL HARDWARE



**WAGER**  
COMPANY

WWW.WAGERUSA.COM  
Toll Free USA: 800-562-7024