

2050-100 ODOR CONTROL SEWER VALVE

The 2050-100 Odor Control Valve is designed to allow for ventilation and odor control at lift stations, wet wells, vaults containing ARV's and forced mains flowing into gravity fed lines. The valve is constructed from aluminum, and is epoxy coated for protection from the harsh outside environment. Each valve contains (2) 50lb (23kg) canisters of Wager odor scrubbing media with Media Life indicator pellets.

A mist eliminator pad is incorporated into the unit to prevent damage to the media bed from moisture.


The 2050-100 contains (2) check valves that allow for fresh air intake directly in the lines or tank without any restrictions from the unit's media bed. Optional caps may be provided if fresh air intake is not required.

The 2050-100 is a passive unit and requires no electricity or fans. It fits beautifully into residential as well as commercial locations where odor complaints are common.

Each vent has louvered covers to allow for maximum air flow of deodorized air. Every vent is equipped with lockable latches to prevent tampering. Available as a vertical mount, or with a side access.



SIDE FLANGE MOUNT AVAILABLE

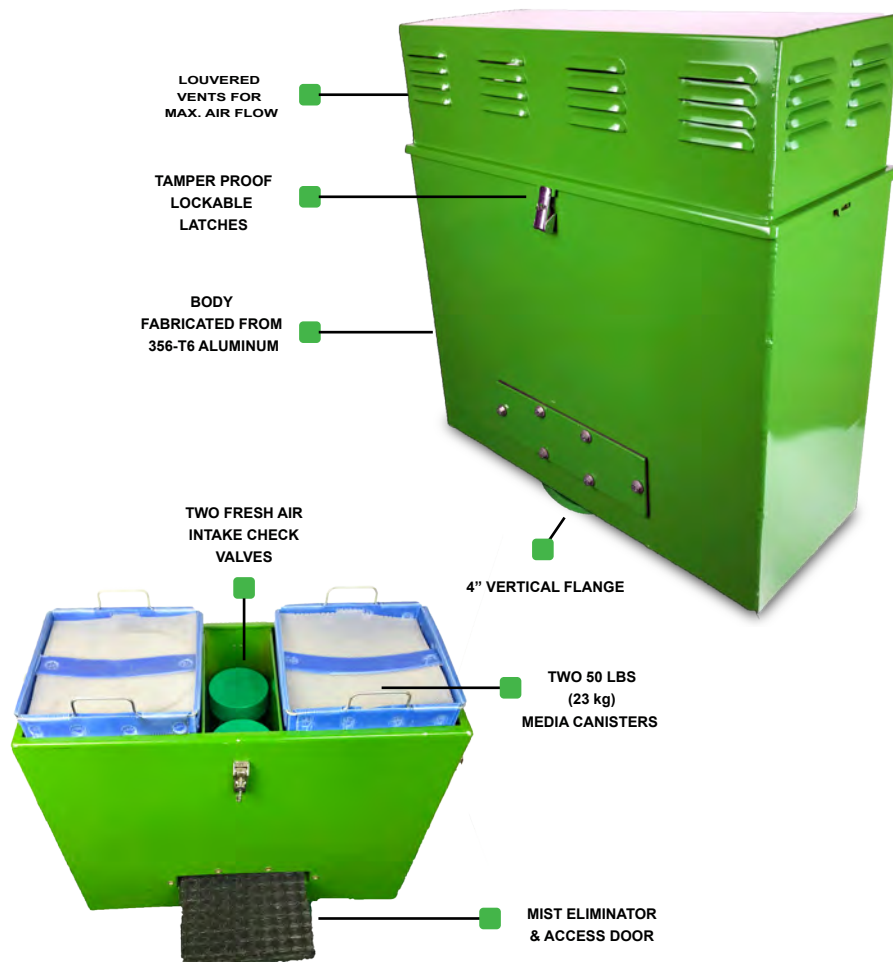

WAGER
COMPANY

WWW.WAGERUSA.COM
Toll Free USA: 800-562-7024